



QC3.2...

OVERALL DIMENSIONS

CH. III PAGE 4

QC32... 2 WAY COMPENSATED FLOW RATE REGULATORS



These QC3.2... compensated flow rate regulators are designed to control and maintain a constant irrespective of the pressure variations upstream and downstream of the regulation section. Their new cast construction has made it possible to obtain a wider flow rate range, taking the upper limit to 35 l/min (4 turns version) while maintaining unchanged the pressure differential required to obtain good pressure compensation.

All models are available with and without reverse flow check valve, complete with an "anti-jump" device on request. This accessory has been designed to eliminate the problem which manifests itself as a "anti-jump" in the controlled actuator due to the instantaneous flow rate variation that takes place under the form of a transient every time the flow is made to pass through the regulator.


Max. operating pressure	320 bar
Opening pressure (with bypass)	1 bar
Min. regulated flow rate (Q1 version)	0.03 ÷ 0.05 l/min
Nominal regulated flow rate (1 turn version)	1,5 ÷ 30 l/min
Nominal regulated flow rate (4 turns version)	1,5 ÷ 35 l/min
Difference in pressure (Δp) for vers. Q1	3 bar
Difference in pressure (Δp) Q2-Q3-Q4-Q5-Q6	8 bar
Hydraulic fluids	Mineral oils DIN 51524
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamination level(*)	class 10 in accordance with NAS 1638 with filter $\beta_{25} \geq 75$
Dependency on temperature (Q1 vers.)	5%
Dependency on temperature (Q2 vers.)	3%
Dependency on temperature (Q3-Q4-Q5-Q6)	2%
Weight	1,5 Kg

(*) Max contamination level must be respect to obtain the right function of the valve


ORDERING CODE

QC	Compensated flow rate regulated
3	CETOP 3/NG6
2	2 way
G	Anti-jump system with internal check valve (omit if not required)
**	Nominal flow rate ranges 1 Turn version 4 Turn version Q1 = 1,5 l/min Q1 = 1,5 l/min Q2 = 3 l/min Q2 = 4 l/min Q3 = 9 l/min Q3 = 10 l/min Q4 = 19 l/min Q4 = 21 l/min Q5 = 24 l/min Q5 = 28 l/min Q6 = 30 l/min Q6 = 35 l/min
K	Version with lock (omit if not required)
*	1 = 1 turn version 4 = 4 turns version
R	With internal check valve (omit if not required)
**	00 = No variant V1 = Viton
5	Serial No.

HYDRAULIC SYMBOLS

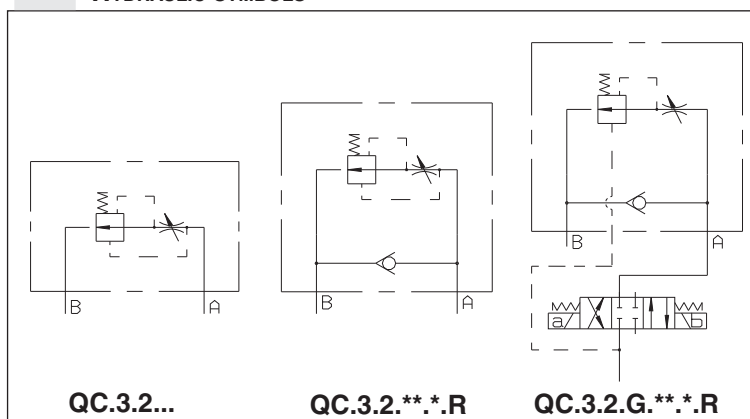

DIAGRAMS

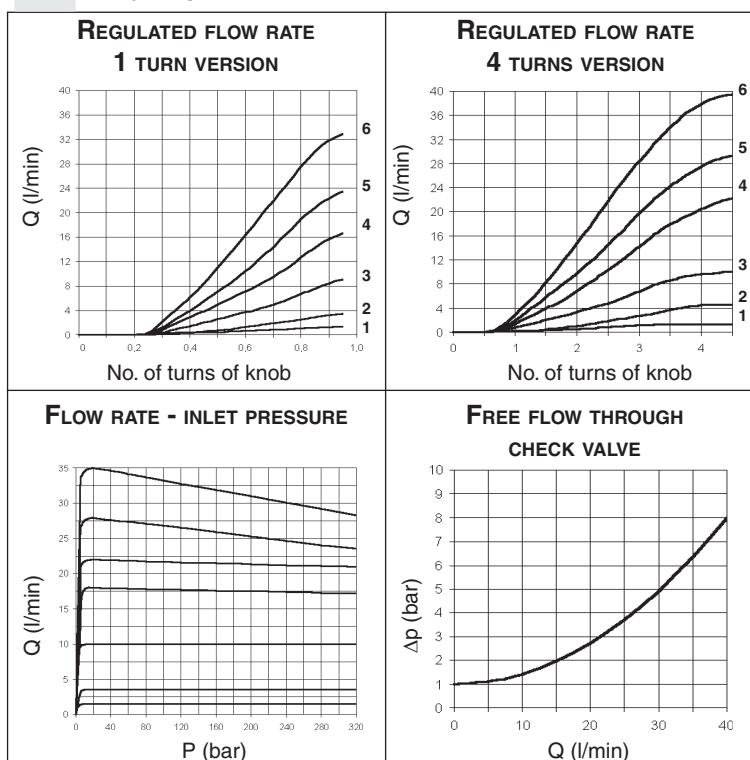



QC.3.3...

OVERALL DIMENSIONS CH. III PAGE 4

AM.3.ABU... CH. III PAGE 4

QC.3.3... 3 WAY COMPENSATED FLOW RATE REGULATORS

brevini

This regulator type can be used whenever it is necessary to obtain a constant fluid flow irrespective of the pressure variations present upstream or downstream. It is fitted with a third T line for discharging any excessive flow rate.

When the reverse flow check valve is needed, the check valve holder type "AM.3.ABU.3..." can be fitted underneath the valve. (The check valve holder must be ordered separately see page III•4)

Max. operating pressure	320 bar
Opening pressure (with bypass)	1 bar
Min. regulated flow rate (Q1 version)	0.03 ÷ 0.05 l/min
Nominal regulated flow rate	1 ÷ 22 l/min
Difference in pressure (Δp) for vers. Q1	3 bar
Difference in pressure (Δp) Q2-Q3-Q4-Q5-Q6	8 bar
Hydraulic fluids	Mineral oils DIN 51524
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamination level(*)	class 10 in accordance with NAS 1638 with filter $\beta_{25} \geq 75$
Dependency on temperature (Q1 vers.)	5%
Dependency on temperature (Q2 vers.)	3%
Dependency on temperature (Q3-Q4-Q5)	2%
Weight	1,5 Kg
(*) Max contamination level must be respect to obtain the right function of the valve	

ORDERING CODE

QC Compensated flow rate regulator

3 CETOP 3/NG6

3 3 way

****** Flow rate ranges

Q1 = 1 l/min

Q2 = 3 l/min

Q3 = 9 l/min

Q4 = 17 l/min

Q5 = 24 l/min

K Version with lock (omit if not required)

***** 1 = 1 turn version


4 = 4 turns version

****** **00** = No variant


V1 = Viton

3 Serial No.

HYDRAULIC SYMBOLS




QC.3.3...




QC.3.3... + AM.3.ABU

DIAGRAMS


REGULATED FLOW RATE

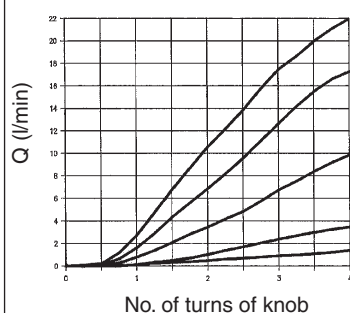


FLOW RATE - PRESSURE DROP



Δp - PUMP FLOW RATE




QC.3.2... 2 WAY FLOW RATE REGULATOR

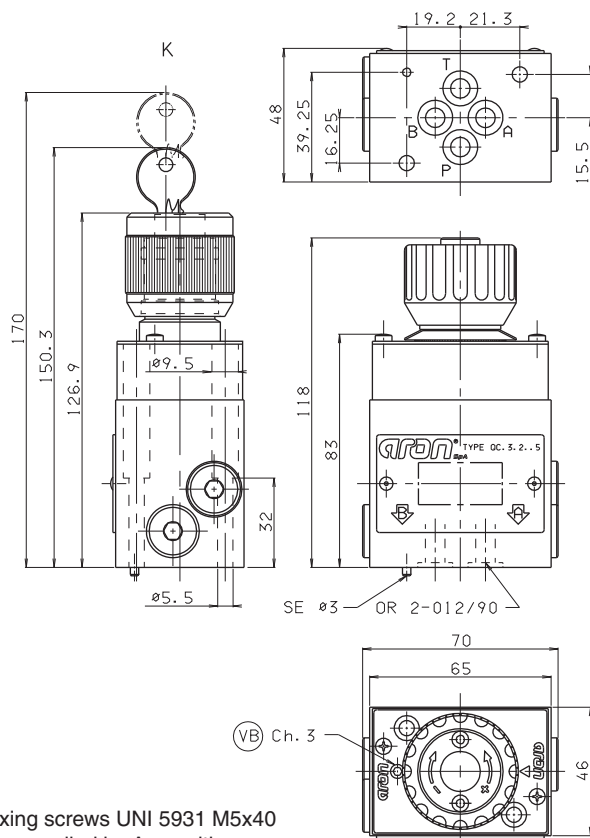

Fixing screws UNI 5931 M5x40
are supplied by Aron with
material specifications min. 12.9
Tightening torque 6.5÷7 Nm / 0.65÷0.70 Kgm

QC.3.3... 3 WAY FLOW RATE REGULATOR

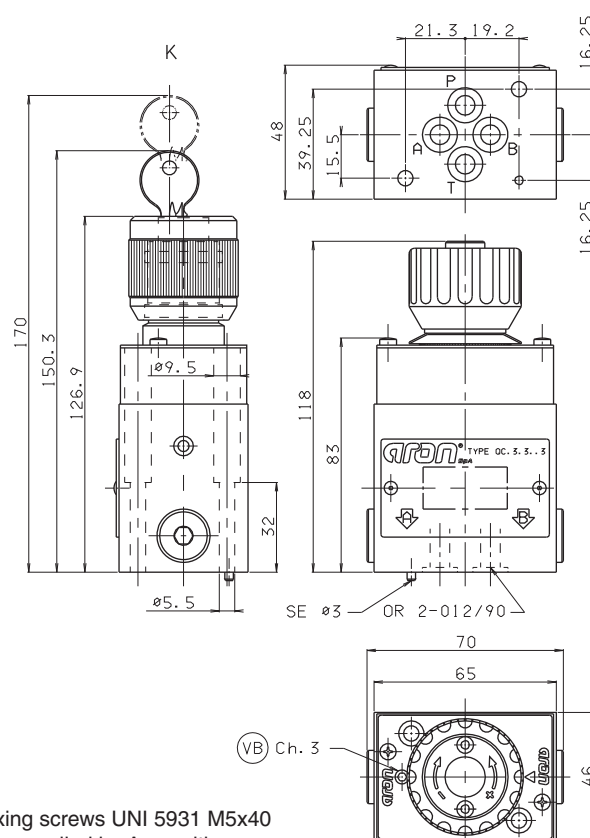

Fixing screws UNI 5931 M5x40
are supplied by Aron with
material specifications min. 12.9
Tightening torque 6.5÷7 Nm / 0.65÷0.70 Kgm

File: ETQC3\$00\$

00/2000/e


**AM.3.ABU... CHECK VALVE HOLDER
FOR REGULATORS TYPE QC.3...**

This check valve holder must be fitted underneath the QC valve when the reverse flow function is needed.



ORDERING CODE

AM	Modulating valve
3	CETOP 3/NG06
ABU	External check valve for QC.3.*.
3	For 2 way and 3 way
00	No variant
1	Serial No.

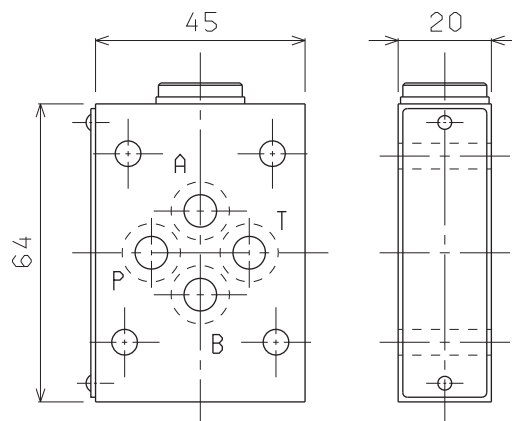

Weight: 0,4 Kg
Fixing screws for regulator and modular check valve M5x60 UNI 5931 - 12.9 K